


Ultra Short Throw Laser Projector

Specifications		LP-TW4001	LP-TW3001
Model name		LP-TW4001	LP-TW3001
Display system		3LCD	
Display device	Size of effective display area	0.59", aspect ratio 16 : 10	
	Number of pixels	1,024,000 pixels (1,280 horizontal × 800 vertical)	
Lens	Zoom	Digital zoom (1.35×)	
	Focus	Powered	
Light source		Laser diode	
Screen size		60 ~ 100 inch (60 ~ 130 inch when no interactive function is used.)	
Light output (Brightness)		4,200 lm ¹	3,300 lm ¹
Contrast ratio (full white / full black)		500,000 : 1 ¹	
Speaker		16 W × 1 mono	
Displayable scanning frequency	Horizontal	15 ~ 106 kHz	
	Vertical	50 ~ 120 Hz	
Display resolution	Computer	VGA, SVGA, XGA, WXGA, SXGA, WXGA+, WXGA++, WSXGA+, UXGA, Full HD, Mac 16"	
	Video	NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, PAL(60 Hz), 480i@60, 480p@60, 576i@50, 576p@50, 720p@50/60, 1080i@50/60, 1080p@50/60	
Terminals	HDMI IN	HDMI connector × 2 (HDMI IN 1 supports MHL input.)	
	COMPUTER IN 1	Mini D-sub 15-pin connector × 1	
	COMPUTER IN 2 / MONITOR OUT	Mini D-sub 15-pin connector × 1	
	VIDEO IN	RCA connector × 1	
	AUDIO IN	3.5 mm stereo mini connector × 2, RCA connector L/R × 1	
	AUDIO OUT	3.5 mm stereo mini connector × 1	
	CONTROL IN (RS-232C)	D-sub 9-pin connector × 1	
	LAN	RJ-45 connector × 1	
	USB-A	USB type A × 2 (PC-LESS Presentation or optional wireless adapter)	
	USB-B	USB type B × 1 (USB Display and USB mouse control)	
Operating temperature		0 - 40 °C ² (The brightness of light source may be reduced automatically over 35 °C.)	
Power requirements		AC 100 - 120 V (50 / 60 Hz), 3.9 A AC 220 - 240 V (50 / 60 Hz), 2.0 A	AC 100 - 120 V (50 / 60 Hz), 3.0 A AC 220 - 240 V (50 / 60 Hz), 1.6 A
Power consumption		AC 100 - 120 V : 380 W AC 220 - 240 V : 380 W	AC 100 - 120 V : 300 W AC 220 - 240 V : 300 W
Standby mode power consumption		Less than 0.5 W ³	
Standard outside dimensions (W × H × D)		512 mm × 155 mm × 424 mm (20.1" × 6.1" × 16.7") (Including protrusions)	506 mm × 139 mm × 424 mm (19.9" × 5.5" × 16.7") (Excluding protrusions)
Weight		Approx. 7.8 kg (17.2 lbs)	Approx. 7.6 kg (16.8 lbs)
Accessories		Remote control with batteries, Power cord, Computer cable, Adapter cover, User's manual, Security label, USB cable, Interactive pen(x2), AAA battery(x4), Pen tip(x4), Application DVD, Hook metal, Screw, Cable tie, HDMI cable holder, Ferrite core	
Optional parts	Filter set	UX43251	
	Mounting accessories	HAS-WM06 (Wall mount, supported image size : 70~110 inch) HAS-9110 (Bracket for fixing mount) HAS-304H (Long adapter for fixing mount)	
	USB wireless adapter	USB-WL-5G ⁴	
	Interactive pen	I-PEN4	
	Finger touch unit	FT-01B	
Network		Wired : 100BASE-TX / 10BASE-T, Wireless (option) : IEEE 802.11a/b/g/n/ac	

*1: When PICTURE MODE is set to DYNAMIC, and LIGHT OUTPUT is set to NORMAL 100%. *2: 0 - 40 °C at altitude from 0m to 1,600 m. 0 - 35 °C at altitude from 1,600 m to 3,048 m. *3: SAVING mode disables the functions of MONITOR OUT, AUDIO OUT, speaker sound, network communication, RS-232C control except POWER ON command, etc. in standby. *4: The availability of the USB-WL-5G varies depending on the country and the region.

—Design and specifications are subject to change without notice.

• The projected images and comparison photos in this catalog are simulations. • LCD panels, polarizers and other optical components and cooling fans may need replacement after prolonged usage. For more details, please consult a Hitachi sales representative. • Do not use in places where there is a lot of water, dampness, steam, dust, soot or tobacco smoke. This may result in fire or malfunction. • Optical components (light source, LCD panel, polarizing plate, PBS [polarizer beam splitter]) have limited service lives. They must be repaired or replaced if they are used for a long period of time. • During use and immediately after use, do not touch anywhere near the vents as these parts are extremely hot. • Optical components other than the light source: If the projector is used for six hours or more per day, they may need to be replaced in less than a year. • LCD panel: If the projector is used continuously for six hours or more, its replacement cycle may be shortened. • Crestron® and Crestron RoomView® are registered trademarks of Crestron Electronics, Inc. in the United States and other countries. • DICOM is the registered trademark of the National Electrical Manufacturers Association for its standards publications relating to digital communications of medical information. • MHL, the MHL logo, and Mobile High-Definition Link are trademarks or registered trademarks of MHL, LLC in the United States and other countries. • HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. • All other trademarks are the properties of their respective owners.

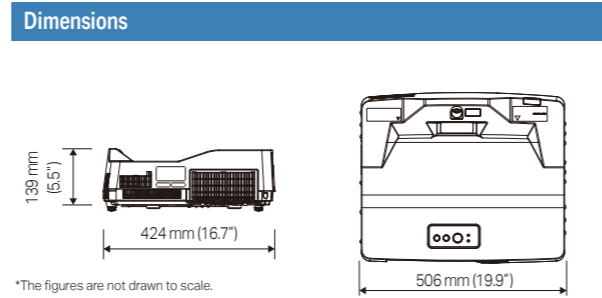

Projection Distance


On a horizontal surface

Suspended from the ceiling

(1,280 × 800) (±8%)

Screen size (diagonal) type (inch)	Projection distance		Screen height	
	a	b	c1	c2
60	1.5	0.079 3.1	0.237 9.3	1.044 41.1
70	1.8	0.149 5.9	0.261 10.3	1.203 47.4
80	2.0	0.219 8.6	0.285 11.2	1.362 53.6
90	2.3	0.289 11.4	0.309 12.2	1.521 59.9
100	2.5	0.359 14.1	0.334 13.1	1.680 66.1
110	2.8	0.428 16.9	0.358 14.1	1.839 72.4
120	3.0	0.498 19.6	0.382 15.0	1.997 78.6
130	3.3	0.568 22.4	0.406 16.0	2.156 84.9

*The figures above are not drawn to scale.

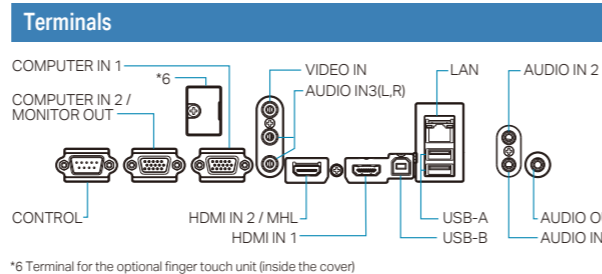

Environment

- ▶ Compliance with EU Directive RoHS¹
- ▶ Power saving mode engaged during standby
- ▶ Long Life mode
- ▶ No use of mercury lamp

¹ RoHS is the acronym of "Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment."

LASER RADIATION DO NOT STARE INTO BEAM CLASS 2 LASER PRODUCT Wavelength : 449-461 nm Max. Output : 36.5 mW IEC 60825-1:2007	RAYONNEMENT LASER NE FIXEZ PAS LE FAISCEAU PRODUIT LASER DE CLASSE 2 Longueur D'onde : 449-461 nm Sortie max. : 36,5 mW IEC 60825-1:2007	雷射輻射 請勿凝視光束 2類雷射光產品 波長 : 449-461 nm 最大輸出 : 36.5 mW IEC 60825-1:2007
CLASS 1 LASER PRODUCT PRODUIT LASER DE CLASSE 1 LASERPRODUKT DER KLASSE 1 IEC/EN 60825-1:2014		


HITACHI

Hitachi America, Ltd., Digital Media Division
 Hitachi Home Electronics Asia (S) Pte. Ltd.
 Hitachi Sales (Malaysia) Sdn. Bhd.
 Hitachi Sales (Thailand), Ltd.
 Hitachi (Hong Kong), Ltd.
 Hitachi Sales Corp. of Taiwan
 Hitachi Australia Pty Ltd.
 Hitachi Europe Ltd., Digital Media Group Consumer Affairs Department
 Hitachi Consumer Marketing, Inc.
 Development and Manufacture : Maxell, Ltd.

2420 Fenton Street, Suite 200 Chula Vista, CA 91914, U.S.A. and Canada Tel: +1-800-448-2244 www.hitachi-america.us/digitalmedia
 438A Alexandra Road #01-01/02/03, Alexandra Technopark, 119967, Singapore Tel: +65-6536-2520 www.hitachiconsumer.com.sg
 Lot 12, Jalan Kemajuan, Bangi Industrial Estate, 43650 Bandar Baru Bangi, Selangor Darul Ehsan, Malaysia Tel: +60-3-8911-2670 www.hitachiconsumer.com.my
 333, 333/1-8 Moo 13, Bangna-Trad Road km 7, Bangkaew, Bangplee, Samutprakarn 10540, Thailand Tel: +66-2335-5455 www.hitachi-th.com
 18th Floor, Ever Gain Centre, 28 On Muk Street, Shatin, N.T., Hong Kong Tel: +852-2113-8883 www.hitachi-hk.com.hk
 2nd Floor, No.65, Nanking East Road, Section 3, Taipei 104, Taiwan Tel: +886-2-2516-0500 www.hsct.com.tw
 Suite 801, Level 8, 123 Epping Road, North Ryde NSW 2113, Australia Tel: +61-2-9888-4100 www.hitachi.com.au
 Whitebrook Park, Lower Cookham Road, Maidenhead, Berkshire, SL6 8YA, UK Tel: +44-844-481-0297 www.hitachidigitalmedia.com
 http://www.hitachi.com.jp/proj/

October 2018

NM-E515 102018

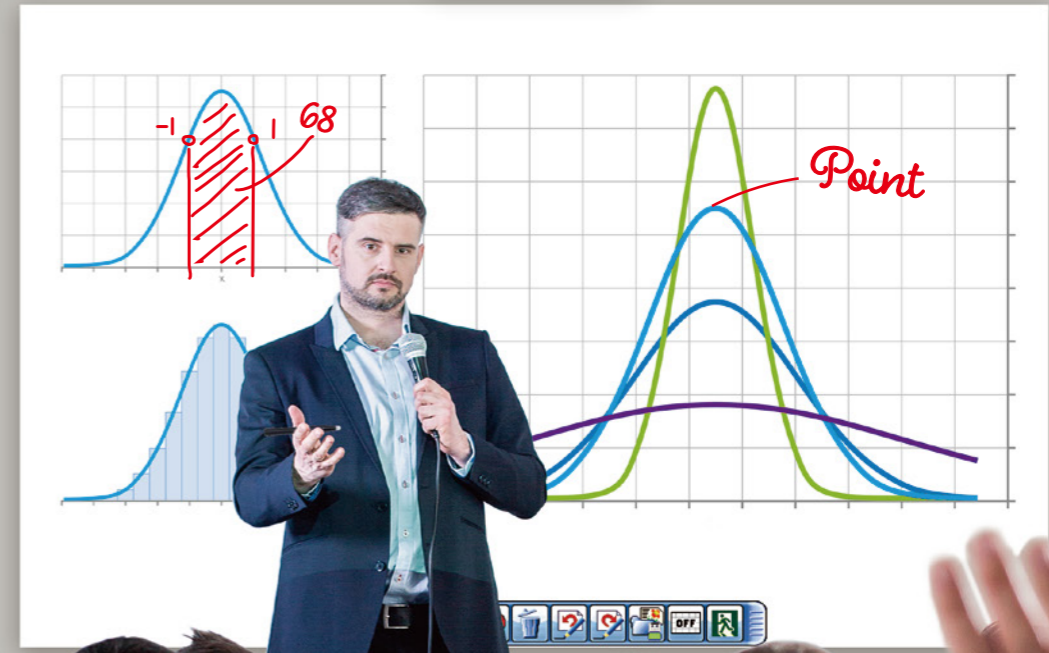

Hitachi 3LCD Ultra Short Throw laser projector delivers a large and vivid image with the unit placed closer to the screen.



LP-TW4001
LP-TW3001

*Projected images are simulations.

An interactive function with enhanced operability and functionality



*Projected images are simulations.

Advanced Writing/Drawing Capabilities

PC less Drawing

T Series projector comes with a built-in drawing function allowing you to directly draw and write on the projected screen without a PC.

Convenient Painter Tool

Equipped with the Pen, Eraser, Undo, Redo functions. You can also change the pen color and thickness. With the easy-to-use Painter tool bar, you can teach classes smoothly.



Save and Open Drawn Screens

You can save the image drawn on the projector screen. This enables you to easily manage what you've taught in the past.


Multiple Interactive Pens

With up to 6 interactive pens pupils can do more than just watch - they can interact with the onscreen content. Let them enjoy providing answers, showing their understanding and becoming involved in lessons as never before.



Finger Touch (Option)

The T Series projector incorporates the optional finger touch unit that enables the projector to detect finger touch activity on the screen area. It allows users to annotate and interact with the material presented. Instead of simply showing static images, students and teachers can interact with on screen material for hands-on interactivity that brings learning to life.



* When using the finger touch unit at bright environment, auto calibration may not be used.
* Please use the finger touch unit on a flat screen.
* The finger touch unit may not be used in locations where there is sunlight or light from an incandescent light source.

Interactive Software

This product includes a drawing application that offers more sophisticated drawing functions.


Neatly Convert Letters or Figures

You can automatically convert freehand shapes into geometric objects and handwriting into text on the projected image. These operations are easily accomplished with the interactive pen.



Select a Variety of Useful Tools

The interactive pen lets you operate a compass, ruler, protractor, stopwatch and other useful tools on the projected image, making lessons even easier to understand.



System requirements for drawing application

Windows®

• **CPU:** Intel® Core™ Duo (1.8GHz or faster) • **HDD:** 2 GB free space • **Memory:** 2 GB or more • **Display:** 32 bit • **OS:** Windows® 7 (32/64bit), Windows® 8.1 (32/64bit), Windows® 10 (32/64bit) (The drawing application has been verified with the latest service pack at the time of release. The drawing application does not support Windows® Tablet PC Edition and Server Edition.) • **Network:** Internet-connected environment • **Application:** Internet Explorer® 11, Microsoft® Word 2013/2016, Microsoft® Excel® 2013/2016, Microsoft® PowerPoint® 2013/2016, Adobe® Reader® X/XI, Adobe® Acrobat® Reader® DC, Adobe® Flash® Player 18 • **Others:** DVD-ROM drive, Video cards supporting hardware overlay feature (for using the movie features) [When using the Webcam function] DV (digital video devices, DV camera, D-VHS etc.), Capture Devices which support DirectShow with WDM drivers [For hosting a remote conference] • **CPU:** Intel® Core™ i3 or greater • **HDD:** 2 GB or more free space • **Memory:** 2 GB or more • **Others:** TCP/IP Network of 54 Mbps or greater

Macintosh

• **CPU:** Intel® Core™ Duo (1.8GHz or faster) • **HDD:** 2 GB free space • **Memory:** 2 GB or more • **Display:** High Color (16 bit) or more • **OS:** Mac OS X 10.10/10.11/10.12/10.13 • **Network:** Internet-connected environment • **Application:** Apple QuickTime 7.6 or later, Adobe® Flash® Player 18 • **Others:** DVD-ROM drive [For hosting a remote conference] • **CPU:** Intel® Core™ i3 or greater • **HDD:** 2 GB or more free space • **Memory:** 2 GB or more • **Others:** TCP/IP Network of 54 Mbps or greater

LINE UP

Tseries
Ultra Short Throw



LP-TW4001

WXGA 4,200 lm



* Local availability may be limited.



LP-TW3001


WXGA 3,300 lm



High Reliability and Stability

Long Life 20,000 hour Laser Light Source


Hitachi's laser light source projectors have 20,000 hours*1 of light source life. Use for 40,000 hours*1 can be achieved in LONG LIFE 2 mode. Also, users may select their desired operation mode. Furthermore, in addition to the light source, the phosphor wheel is also dust resistant, suppressing brightness level reduction by preventing dust from coming into contact with the optical parts. Users can enjoy using the projector for long periods of time while maintaining its brightness.

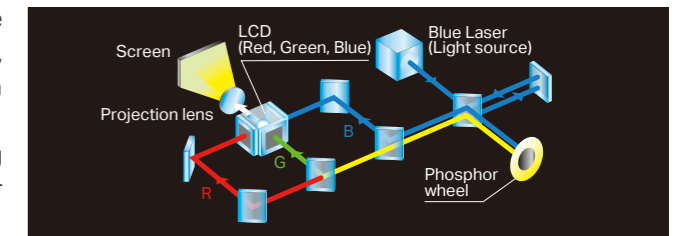

*1 For laser light source. The value is an estimate and may vary depending on the use environment or use condition.

LIGHT OUTPUT	Brightness*2		Light source life*3	Noise*4
	LP-TW4001	LP-TW3001		
NORMAL	4,200 lm	3,300 lm	20,000 hours	34 dB
LONG LIFE 1	3,150 lm	2,470 lm	30,000 hours	
LONG LIFE 2	2,100 lm	1,650 lm	40,000 hours	28 dB
WHISPER	2,100 lm	1,650 lm	20,000 hours	

Brightness Deterioration Comparison between Light Output Modes

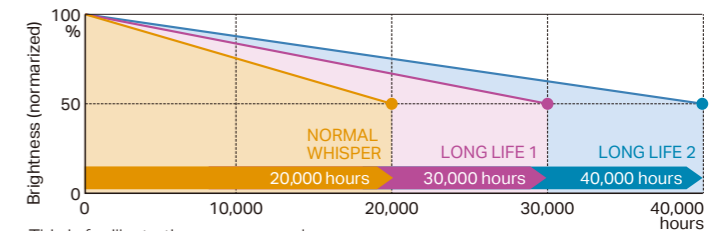

This is for illustrative purposes only.


*2 These are reference values and may vary depending on products. *3 The values are an estimate and may vary depending on the use environment or use condition.

*4 Reference values when used in an ambient temperature of 23 °C. The noise level varies by the projector model, installation environment, and use condition.

Installability

Reduced Glare and Shadows

These projectors feature Ultra Short Throw, for projecting a 2.0 m (80 inch) image from only 55 cm (21.8 inches) onto a wall or screen. The Ultra Short Throw greatly reduces glare from the projector's light source, making it easier for a teacher or presenter to see the audience. The audience also has a clearer view because the shadows of the teacher's or presenter's hands and body are minimized. The result is a better classroom or meeting room experience for everyone.

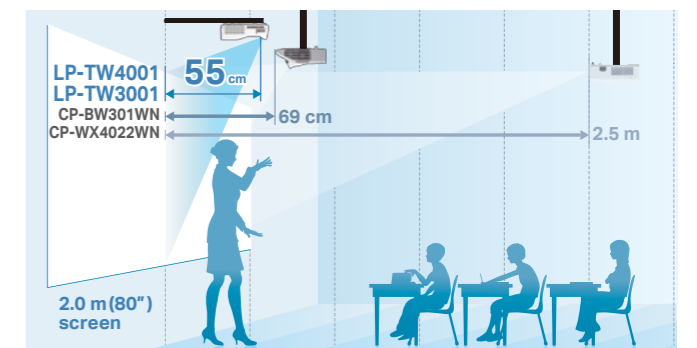


This figure is not drawn to scale.

Convenient Functions

Easy Schedule Setting

You can schedule routine and special projector events, including power on, power off, input selection and other settings.

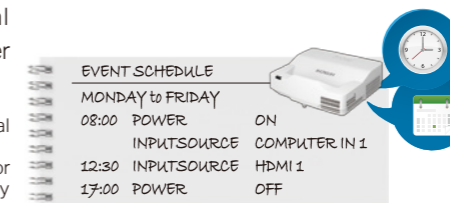

* This function requires a coin battery for the internal clock or connecting to an SNTP server on network.

* When STANDBY MODE is set to NETWORK (WOL) or SAVING, this function (ex. POWER ON) at standby mode will not be operated.

Wireless Dual Band Support (Option)

Provides a stable wireless network environment by supporting wireless dual band (2.4 GHz / 5 GHz).



* Dual Band may be restricted in some countries and regions.

Other Functions

- Quick Start
- DICOM® Simulation Mode*5
- 16W Internal Speaker
- MHL connectivity
- Smart Device Control & Monitoring
- Moderator Control Mode
- PIN lock
- Key lock

*5 This projector is not a medical device and is not compliant to the DICOM standard, and neither the projector nor this function should be used for medical diagnosis.