

LCD Projectors

HITACHI
Inspire the Next



**High performance projectors ideal
for use in large spaces**

LCD Projectors

CP-WX8240 WXGA 4,000 Lumens

CP-X8150 XGA 5,000 Lumens





Designed for use in conference halls or auditoriums with flexible installation and outstanding features




Superior Lens Shift

Superior Lens Shift lets you select the most convenient installation location in a large space.

Variety of Lens Options


Three optional lenses are available in addition to the standard lens. You can choose the most appropriate lens for a wide range of projection distances.

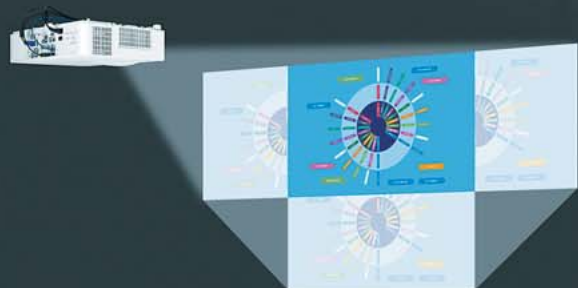


LCD Projectors

CP-WX8240 WXGA 4,000 Lumens

CP-X8150 XGA 5,000 Lumens

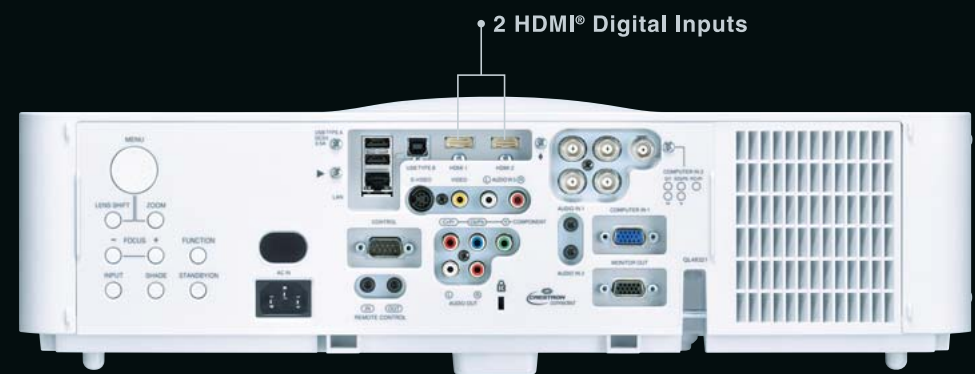

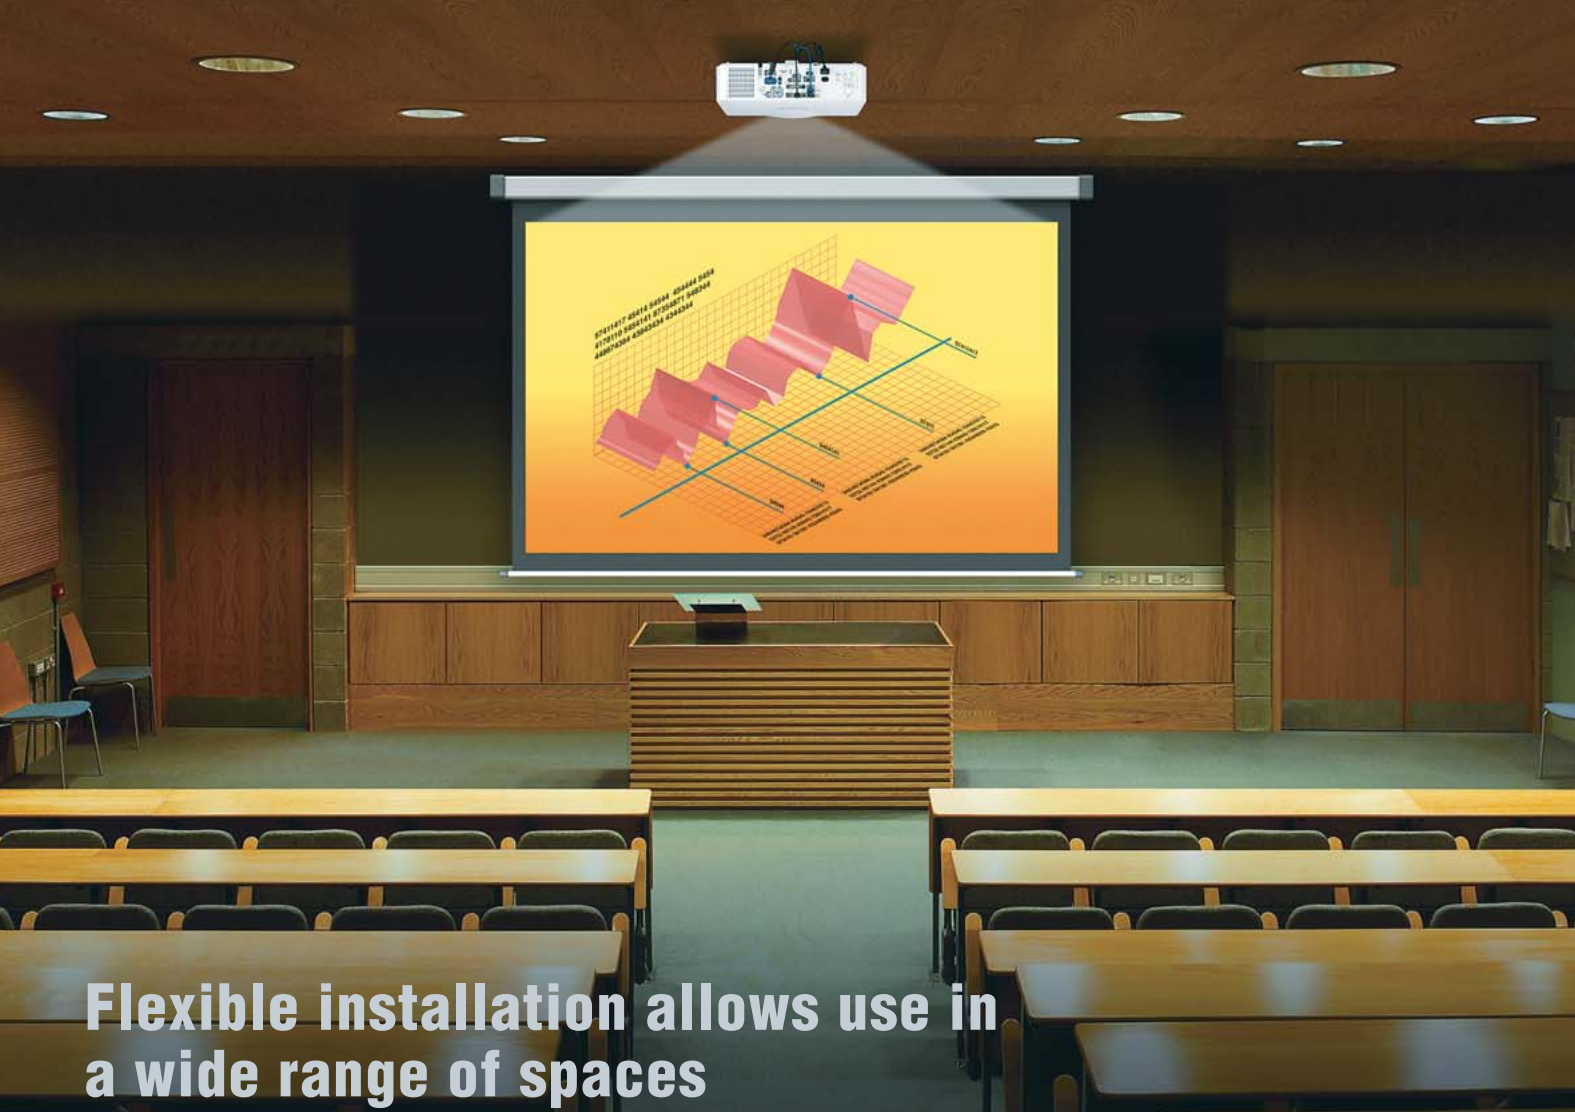

Flexible installation allows use in a wide range of spaces


■ Lens Shift and Motorized Lens

Lens Shift allows a broad installation area. The projectors can cover a total range of 2 screen areas horizontally and 1.7 screen (CP-WX8240)/1.6 screen (CP-X8150) areas vertically. With ceiling installation, they can shift left or right by 0.5 of the screen's width and down by 0.7 (CP-WX8240)/0.6 (CP-X8150) of the screen's height. Using the optical lens shift function, you can move the projection lens horizontally five times more than with the CP-WX625. This lens shift lets you install your projector within a wide area. In addition, with motorized settings including optical lens shift, zoom, and focus adjustments, you can adjust these settings from a distance by simply using the remote control.




■ Lens Memory

Lens Memory lets you store up to three patterns of settings for lens shift position. This eliminates the need to make adjustments for settings, so you can quickly begin projection with the proper settings.

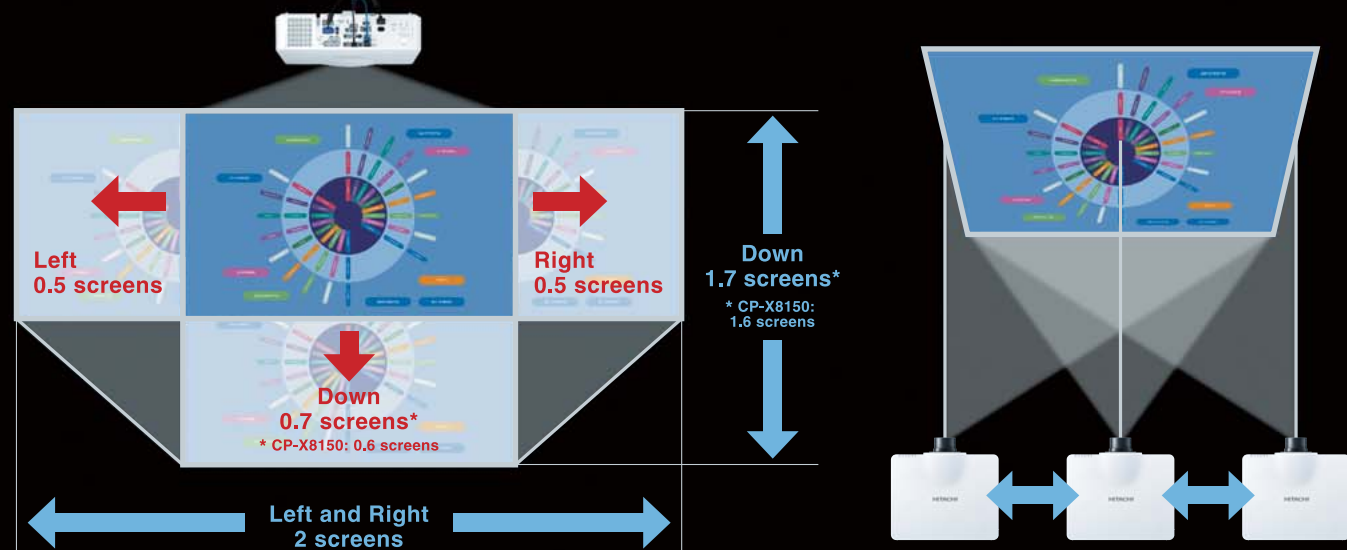

3 Optional Lenses and 1 Standard Lens

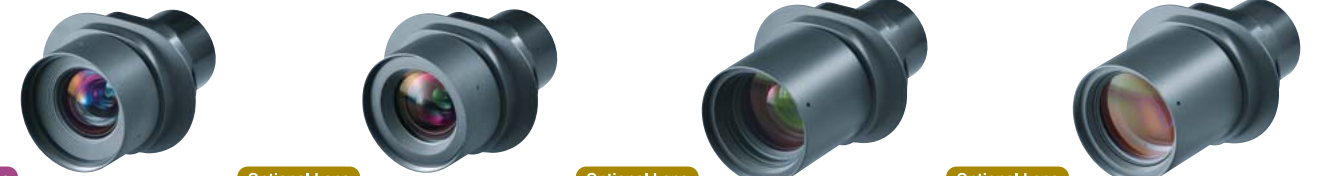

Standard Lens

Short throw zoom lens
SL-702 Zoom: x1.5

Optional Lens

Middle throw zoom lens
ML-703 Zoom: x2.0

Optional Lens

Long throw zoom lens
LL-704 Zoom: x1.7

Optional Lens

Ultra long throw zoom lens
UL-705 Zoom: x1.7


* Fixed short throw option lens, FL-701, will be available in Spring 2012.

The CP-WX8240 and CP-X8150 provide three optional lenses in addition to the standard lens, so you can use a wide range of installation environments. For example, by making use of four types of lenses, projection onto a 100" screen can be achieved from a distance of anywhere from 3.2 to 22.3 meters (127"–879") with the CP-WX8240, and 3.1 to 21.1 meters (120"–830") with the CP-X8150, allowing them to easily match the available space.

Projection distances for standard lens and optional lenses when projecting onto a 100" screen.


SL-702

CP-WX8240: 3.2 — 4.9m (127" — 192")
CP-X8150: 3.1 — 4.6m (120" — 181")




ML-703

CP-WX8240: 4.1 — 8.1m (162" — 321")
CP-X8150: 3.9 — 7.7m (153" — 303")




LL-704

CP-WX8240: 7.8 — 13.2m (305" — 520")
CP-X8150: 7.3 — 12.4m (288" — 490")




UL-705

CP-WX8240: 13.1 — 22.3m (516" — 879")
CP-X8150: 12.4 — 21.1m (487" — 830")



PROJECTION DISTANCE

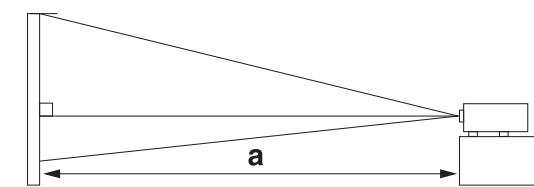

a: LCD projector-to-screen distance

CP-WX8240

Screen Size (16:10 Screen)	Standard Lens SL-702 (Short throw zoom lens)		Optional Lens ML-703 (Middle throw zoom lens)		Optional Lens LL-704 (Long throw zoom lens)		Optional Lens UL-705 (Ultra long throw zoom lens)	
	a Min	a Max	a Min	a Max	a Min	a Max	a Min	a Max
30 type (inch), 0.8m	1.0m (39")	1.5m (58")	1.2m (49")	2.5m (97")	2.3m (92")	3.9m (154")	4.1m (162")	6.9m (270")
40 type (inch), 1.0m	1.3m (52")	2.0m (77")	1.7m (65")	3.3m (129")	3.1m (123")	5.2m (207")	5.4m (213")	9.1m (357")
60 type (inch), 1.5m	2.0m (77")	2.9m (115")	2.5m (97")	4.9m (193")	4.7m (183")	7.9m (311")	8.0m (314")	13.5m (531")
70 type (inch), 1.8m	2.3m (89")	3.4m (135")	2.9m (114")	5.7m (225")	5.4m (214")	9.2m (363")	9.3m (364")	15.7m (618")
80 type (inch), 2.0m	2.6m (102")	3.9m (154")	3.3m (130")	6.5m (257")	6.2m (244")	10.5m (415")	10.5m (415")	17.9m (705")
100 type (inch), 2.5m	3.2m (127")	4.9m (192")	4.1m (162")	8.1m (321")	7.8m (305")	13.2m (520")	13.1m (516")	22.3m (879")
120 type (inch), 3.0m	3.9m (153")	5.8m (230")	4.9m (194")	9.8m (385")	9.3m (366")	15.8m (624")	15.7m (617")	26.7m (1053")
150 type (inch), 3.8m	4.8m (191")	7.3m (287")	6.2m (243")	12.2m (481")	11.6m (458")	19.8m (780")	19.5m (769")	33.4m (1314")
200 type (inch), 5.1m	6.4m (254")	9.7m (383")	8.2m (324")	16.3m (641")	15.5m (610")	26.5m (1041")	25.9m (1021")	44.4m (1749")
250 type (inch), 6.4m	8.0m (317")	12.1m (478")	10.3m (404")	20.3m (801")	19.4m (763")	33.1m (1302")	32.4m (1274")	55.5m (2184")
300 type (inch), 7.6m	9.7m (380")	14.6m (573")	12.3m (485")	24.4m (961")	23.2m (915")	39.7m (1563")	38.8m (1527")	66.5m (2619")
350 type (inch), 8.9m	11.3m (443")	17.0m (669")	14.4m (566")	28.5m (1121")	27.1m (1067")	46.3m (1824")	45.2m (1780")	77.8m (3054")
400 type (inch), 10.2m	12.9m (506")	19.4m (764")	16.4m (647")	32.5m (1281")	31.0m (1220")	53.0m (2085")	51.6m (2032")	88.6m (3490")
500 type (inch), 12.7m	16.1m (633")	24.3m (955")	20.5m (808")	40.7m (1601")	38.7m (1525")	66.2m (2607")	64.5m (2538")	110.7m (4360")
600 type (inch), 15.2m	19.3m (759")	29.1m (1146")	24.6m (970")	48.8m (1921")	46.5m (1829")	79.5m (3128")	77.3m (3043")	132.8m (5230")

* Tolerance ±10% (for projection distance a) • Final specifications may vary slightly.

CP-X8150

Screen Size (4:3 Screen)	Standard Lens SL-702 (Short throw zoom lens)		Optional Lens ML-703 (Middle throw zoom lens)		Optional Lens LL-704 (Long throw zoom lens)		Optional Lens UL-705 (Ultra long throw zoom lens)	
	a Min	a Max	a Min	a Max	a Min	a Max	a Min	a Max
30 type (inch), 0.8m	0.9m (37")	1.4m (55")	1.2m (46")	2.3m (91")	2.2m (87")	3.7m (145")	3.9m (154")	6.5m (255")
40 type (inch), 1.0m	1.2m (49")	1.9m (73")	1.6m (61")	3.1m (121")	2.9m (116")	4.9m (195")	5.1m (201")	8.6m (337")
60 type (inch), 1.5m	1.8m (73")	2.8m (109")	2.3m (92")	4.6m (182")	4.4m (173")	7.4m (293")	7.5m (297")	12.7m (501")
70 type (inch), 1.8m	2.1m (84")	3.2m (127")	2.7m (107")	5.4m (212")	5.1m (202")	8.7m (342")	8.7m (344")	14.8m (583")
80 type (inch), 2.0m	2.4m (96")	3.7m (145")	3.1m (122")	6.2m (242")	5.9m (231")	9.9m (392")	10.0m (392")	16.9m (666")
100 type (inch), 2.5m	3.1m (120")	4.6m (181")	3.9m (153")	7.7m (303")	7.3m (288")	12.4m (490")	12.4m (487")	21.1m (830")
120 type (inch), 3.0m	3.7m (144")	5.5m (217")	4.7m (183")	9.2m (363")	8.8m (346")	14.9m (589")	14.8m (583")	25.2m (994")
150 type (inch), 3.8m	4.6m (180")	6.9m (271")	5.8m (229")	11.5m (454")	11.0m (432")	18.7m (736")	18.4m (726")	31.5m (1240")
200 type (inch), 5.1m	6.1m (239")	9.2m (361")	7.8m (305")	15.4m (605")	14.6m (576")	25.0m (982")	24.5m (964")	41.9m (1651")
250 type (inch), 6.4m	7.6m (299")	11.5m (451")	9.7m (381")	19.2m (756")	18.3m (720")	31.2m (1228")	30.5m (1203")	52.4m (2061")
300 type (inch), 7.6m	9.1m (359")	13.7m (541")	11.6m (458")	23.0m (907")	21.9m (863")	37.5m (1475")	36.6m (1441")	62.8m (2472")
350 type (inch), 8.9m	10.6m (418")	16.0m (631")	13.6m (534")	26.9m (1057")	25.6m (1007")	43.7m (1721")	42.7m (1679")	73.2m (2882")
400 type (inch), 10.2m	12.1m (478")	18.3m (721")	15.5m (610")	30.7m (1208")	29.2m (1151")	50.0m (1967")	48.7m (1918")	83.6m (3293")
500 type (inch), 12.7m	15.2m (597")	22.9m (901")	19.4m (762")	38.4m (1510")	36.5m (1438")	62.5m (2459")	60.8m (2395")	104.5m (4113")
600 type (inch), 15.2m	18.2m (716")	27.5m (1081")	23.2m (915")	46.0m (1812")	43.8m (1726")	75.0m (2951")	72.9m (2871")	125.3m (4934")

* Tolerance ±10% (for projection distance a) • Final specifications may vary slightly.

Superior functionality found in a slim body design

Advanced Network Functions*1


Convenient Networking

Embedded networking gives you the ability to manage and control multiple projectors over your LAN: Centralized Reporting, Scheduling, E-mail Alerts, and My Image (Image Transfer).



Multi Projector*2*3

You can project the same image to up to 12** projectors simultaneously. This is useful for meetings and lectures in large venues where a single screen would not be sufficient.

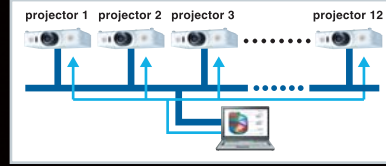

*1 Video transfer through network may not be supported depending on combination of computer hardware and software. For projecting video sources, video/computer cable is preferable.
 *2 This function will be provided later by software update from the website <http://www.hitachi-america.us/digitalmedia>
 *3 To secure better performance, a wired network is preferable.
 *4 Video transfer speed may vary depending on number of projectors connected.

Hardware and software requirements for network capability
OS: One of the following. Windows® XP Home Edition/Professional Edition (32 bit version only), Windows Vista® Home Basic/Home Premium/Business/Ultimate/Enterprise (32 bit version only), Windows® 7 Starter/Home Basic/Home Premium/Professional/Ultimate/Enterprise (32 bit version only) **CPU:** Pentium® 4 (2.8 GHz or higher) **Graphic card:** 16 bit, XGA or higher (When using the "LiveViewer" it is recommended that the display resolution of your computer be set to 1024 x 768.) **Memory:** 512 MB or higher **Hard disk space:** 100 MB or higher **Web browser:** Internet Explorer® 6.0 or higher **CD-ROM drive**
 • If many computers are connected to the network or the connected computer is under excessive load, higher specifications may be required.

Wireless Capability (Option)

You can use a wireless network by connecting the projector to a computer using the optional USB wireless adapter. The adapter supports IEEE802.11b/g/n.



2 HDMI Digital Inputs

The two HDMI inputs allow digital connection via a single cable, for video and audio from various types of equipment. You enjoy high picture quality and high sound quality for a wide range of uses.



Perfect Fit

Perfect Fit enables quick adjustment of the projected image by moving its four corners one at a time. In addition, barrel or pincushion distortion, which occur on rounded surfaces, can easily be corrected.

• Perfect Fit may decrease picture quality as a result of the compensation and resizing processes.



DICOM® Simulation Mode

The DICOM (Digital Imaging and Communications in Medicine) Simulation Mode projects grayscale images which approximate DICOM Part 14 specifications. This mode is ideal for viewing grayscale medical images, such as X-rays, for training and educational purposes.

• The projectors have a DICOM (Digital Imaging and Communications in Medicine) Simulation Mode. This mode simulates the DICOM standard, which is a standard applicable to digital communications in medicine, and is useful for displaying medical images such as X-rays. These projectors are not medical devices and are not compliant with the DICOM standard, and neither the projector nor the DICOM Simulation Mode should be used for medical diagnosis.
 • Comparison photos are simulations.



Standard Mode



DICOM Simulation Mode



LCD Projector

CP-WX8240 WXGA 4,000 Lumens



LCD Projector

CP-X8150 XGA 5,000 Lumens



Easy Maintenance

Lamp door and filter cover are on both sides, facilitating maintenance and replacement when the projector is installed on the ceiling.

High Performance Filter


The high performance filter is made of two layers of unwoven cloth and lasts up to approximately 15,000 hours* without cleaning, reducing maintenance time.

* Varies according to usage environment.




3 LCD Panels with Inorganic Alignment Layers

These projectors incorporate three LCD panels with inorganic alignment layers that are extremely light resistant, increasing brightness and contrast ratio. They ensure smooth images and high reliability.



Easy-to-Use Remote Control

The remote control has four ID buttons. When operating multiple projectors at one time, each projector ID can be changed to prevent confusion. It also has an F5 button for starting presentations quickly, and Direct Input Source select buttons.

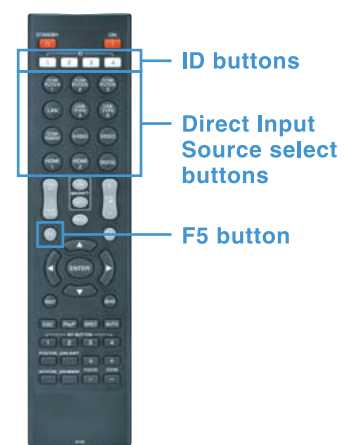

More Convenient Features


- Mechanical SHADE • Operating Altitude: 0-3,048m (0-10,000ft) • Low Noise of 29dB*1 (Eco Mode) • PC-Less Presentation
- Display via USB • Template Function*2 • Closed Caption • Auto Vertical Keystone Correction • Compatible with AMX Device Discovery
- Compatible with Crestron RoomView® • VESA Compatible Ceiling Mount Screw Holes

*1 Typical. Tested in 23°C environmental conditions. *2 Patent pending


SPECIFICATIONS

Model name	CP-WX8240	CP-X8150
Liquid crystal panel	0.59 type (inch), 1.5cm polysilicon active-matrix TFT x 3	0.63 type (inch), 1.6cm polysilicon active-matrix TFT x 3
Number of pixels	1,024,000 pixels (H1280 x V800)	786,432 pixels (H1024 x V768)
Resolution	1280 x 800 color pixels (WXGA)	1024 x 768 color pixels (XGA)
Motorized zoom	x1.5	
Lamp	245W UHP	
Light output (brightness)	4,000 Lumens	5,000 Lumens
Contrast ratio	3,000:1 (Presentation mode)	
Audio	8W x 2	
Keystone correction	Auto Vertical Keystone	
Power supply	AC100-120V/AC220-240V	
Operating temperature	0-40°C (32-104°F)	
Input signals	VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+, UXGA, MAC16*	
Computer input	NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, PAL (60Hz)	
Video input	480i@60, 480p@60, 576i@50, 576p@50, 720p@50/60, 1080i@50/60, 1080p@50/60	
Input/output terminals	S-Video: Mini DIN 4 pin jack x 1, Composite video: RCA jack x 1, Component video: RCA jack x 3	
Video input x 3	3.5mm (stereo) mini jack x 2, RCA jack x 2 (L/R)	
Audio input x 3	Analog RGB: D-sub 15 pin mini jack x 1, BNC jack x 5	
Computer input x 2	HDMI connector x 2 (HDCP compliant)	
HDMI input x 2	3.5mm (stereo) mini jack x 1	
Remote control input	RCA jack x 2 (L/R)	
Audio output x 1	Analog RGB: D-sub 15 pin mini jack x 1	
Monitor output x 1	3.5mm (stereo) mini jack x 1	
Remote control output	USB type A connector x 2 (for PC-less presentation or wireless adapter), USB type B connector x 1 (for USB display or USB mouse control)	
USB	D-sub 9 pin plug x 1 for RS232C	
Control	Option	
Wireless network	RJ45 jack x 1	
Wired network (LAN)	UL/cUL, FCC Part15 class A, AS/NZS CISPR22 class A, CE, GOST-R	
Agency certifications	498 x 135 x 396mm (19.6" x 5.3" x 15.6") [excluding protruding part]	
Dimensions (WxHxD)	Approximately 8.3kg (18.3 lbs.)	
Weight	Remote control (Part#: HL02801) with two AA batteries, Power cord, Computer cable, Lens cover, User's manuals, Security label, Application CD, Adapter cover	
Standard accessories	Lamp: DT01281, Filter set: MU06642, USB wireless adapter: USB-WL-11N	
Optional accessories		

DIMENSIONS

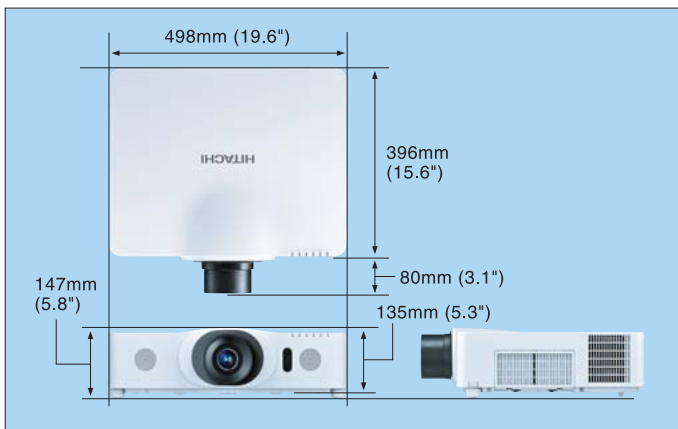

TERMINALS

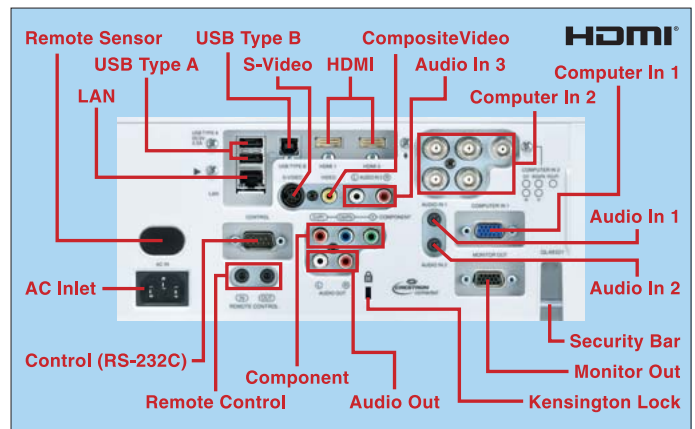

Consideration for the Environment

Compliance with EU Directive RoHS*1

*1 RoHS is the acronym of "DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment".

Reduction of resin usage in production

Use of hot runners in molds for making upper housing in order to reduce mill ends.

Power saving mode engaged during standby

Eco mode

Eco mode provides power saving.

- Design and specifications are subject to change without notice.
- The projected images and comparison photos in this catalog are simulations.
- LCD panels, polarizers and other optical components and cooling fans may need replacement after prolonged usage. For more details, please consult a Hitachi sales representative.
- Do not use in places where there is a lot of water, dampness, steam, dust, soot or tobacco smoke. This may result in fire or malfunction.
- Optical components (lamp, LCD panel, polarizing plate, PBS [polarizer beam splitter]) have limited service lives. They must be repaired or replaced if they are used for a long period of time.
- These projectors use a mercury lamp with high internal pressure. Because of its properties, this lamp may burst with a loud noise or burn out if struck or after it has been used for a period of time. The time until it bursts or burns out varies greatly according to differences between lamps and usage conditions. Turning the lamp's power on and off frequently shortens its service life.
- Optical components other than the lamp: If the projector is used for six hours or more per day, they may need to be replaced in less than a year.
- LCD panel: If the projector is used continuously for six hours or more, its replacement cycle may be shortened.
- Do not turn projector on again for ten minutes after shutdown. Neglect can shorten the lifetime of the lamp. During use and immediately after use, do not touch anywhere near the lamp and the vents as these parts are extremely hot.
- Windows®, Windows Vista® and Internet Explorer® are trademarks, or registered trademarks of Microsoft Corporation in the United States and/or other countries.
- Pentium® is trademark of Intel Corporation in the U.S. and/or other countries.
- Crestron® and Crestron RoomView® are registered trademarks of Crestron Electronics, Inc. in the United States and other countries.
- HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.
- DICOM® is the registered trademark of the National Electrical Manufacturers Association for its standards publications relating to digital communications of medical information.
- All other trademarks are the properties of their respective owners.



HITACHI

Hitachi America, Ltd., Digital Media Division 900 Hitachi Way, Chula Vista, CA 91914-3556, U.S.A. and Canada Tel: +1-800-225-1741 www.hitachi-america.us/digitalmedia
 Hitachi Home Electronics Asia (S) Pte. Ltd. 438A Alexandra Road #01-01/02/03, Alexandra Technopark, 119967, Singapore Tel: +65-6536-2520 www.hitachiconsumer.com.sg
 Hitachi Sales (Malaysia) Sdn. Bhd. Lot 12, Jalan Kemajuan, Bangi Industrial Estate, 43650 Bandar Baru Bangi, Selangor Darul Ehsan, Malaysia
 Tel: +60-3-8911-2670 www.hitachiconsumer.com.my
 Hitachi Sales (Thailand), Ltd. 994, 996 Soi Thonglor, Sukhumvit 55 Road, Klongtonnua, Vadhana Bangkok 10110, Thailand Tel: +66-2381-8381-98 www.hitachi-th.com
 Hitachi (Hong Kong), Ltd. 18th Floor, Ever Gain Centre, 28 On Muk Street, Shatin, N.T., Hong Kong Tel: +852-2113-8883 www.hitachi-hk.com.hk
 Hitachi Sales Corp. of Taiwan 2nd Floor, No.65, Nanking East Road, Section 3, Taipei 104, Taiwan Tel: +886-2-2516-0500 www.hsct.com.tw
 Hitachi Australia Pty Ltd. Suite 801, Level 8, 123 Epping Road, North Ryde NSW 2113, Australia Tel: +61-2-9888-4100 www.hitachi.com.au
 Hitachi Europe Ltd., Digital Media Group Consumer Affairs Department Whitebrook Park, Lower Cookham Road, Maidenhead, Berkshire, SL6 8YA, UK
 Tel: +44-1628-585000 www.hitachidigitalmedia.com